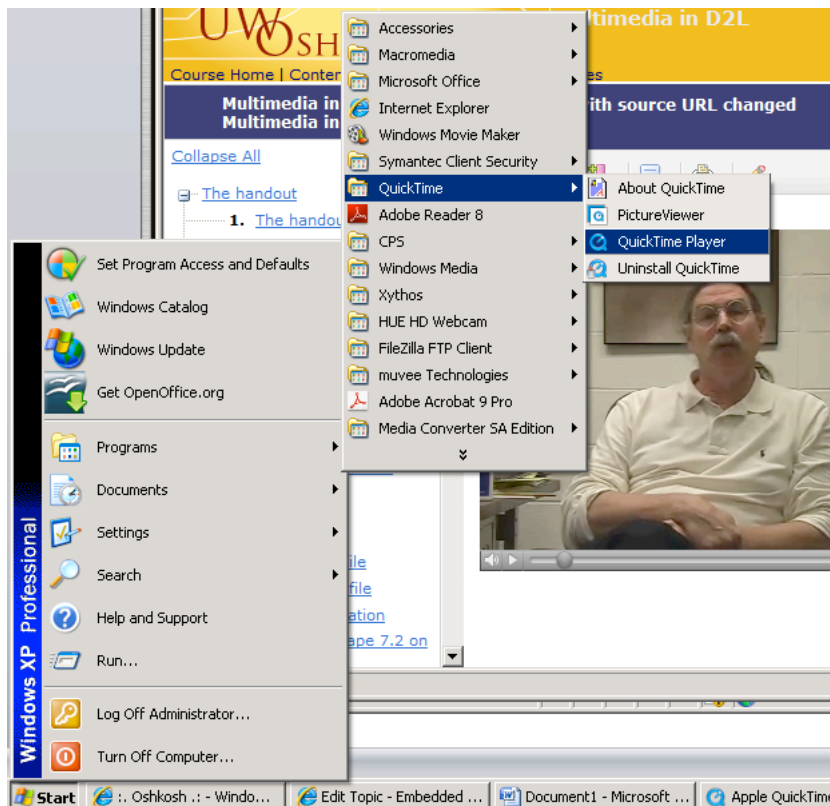# Inserting a video (or audio) file from TitanWeb into a D2L topic

Nick Dvoracek (dvoracek@uwosh.edu 424-7363

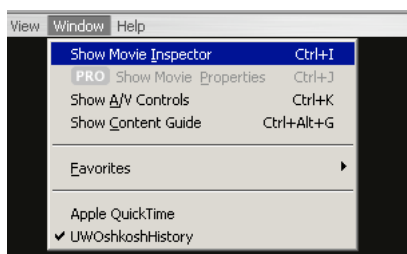**Information about your Quicktime movie**.

You'll need to know the dimensions, in pixels of your quicktime movie.

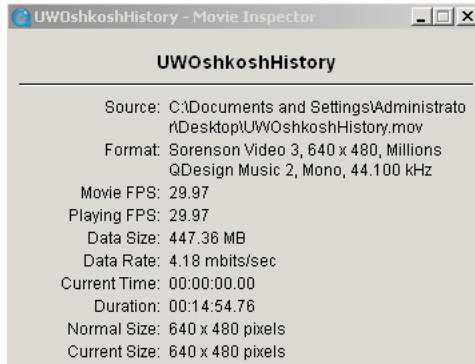Launch Quicktime player. It should appear on your Programs menu

Open your movie file (File…Open File)
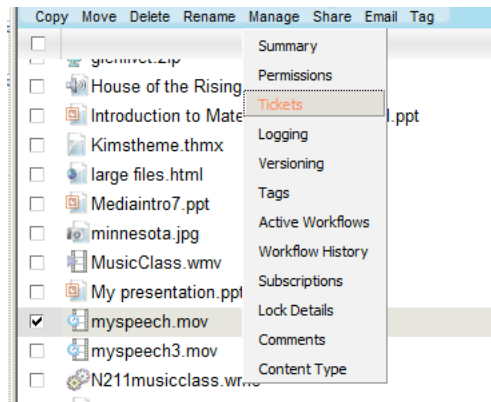
Under the Window Menu, select Show Movie Inspector

In the Movie Inspector Window, note the Normal size. The larger number will be the width, the smaller number the height.

Upload to Titan Files and create a ticket
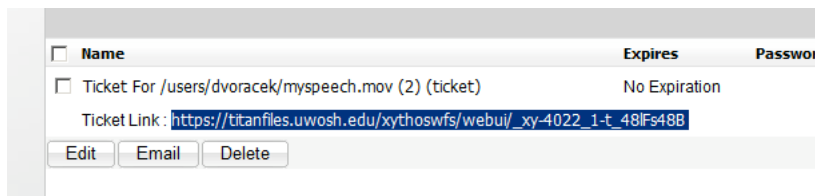
Upload your movie to Titan Files. (This should probably be to the **instructor's** Titan Files account).

Create a ticket for that file with the appropriate duration (if you're going to use this file over and over from semester to semester, Unlimited would be the best choice)
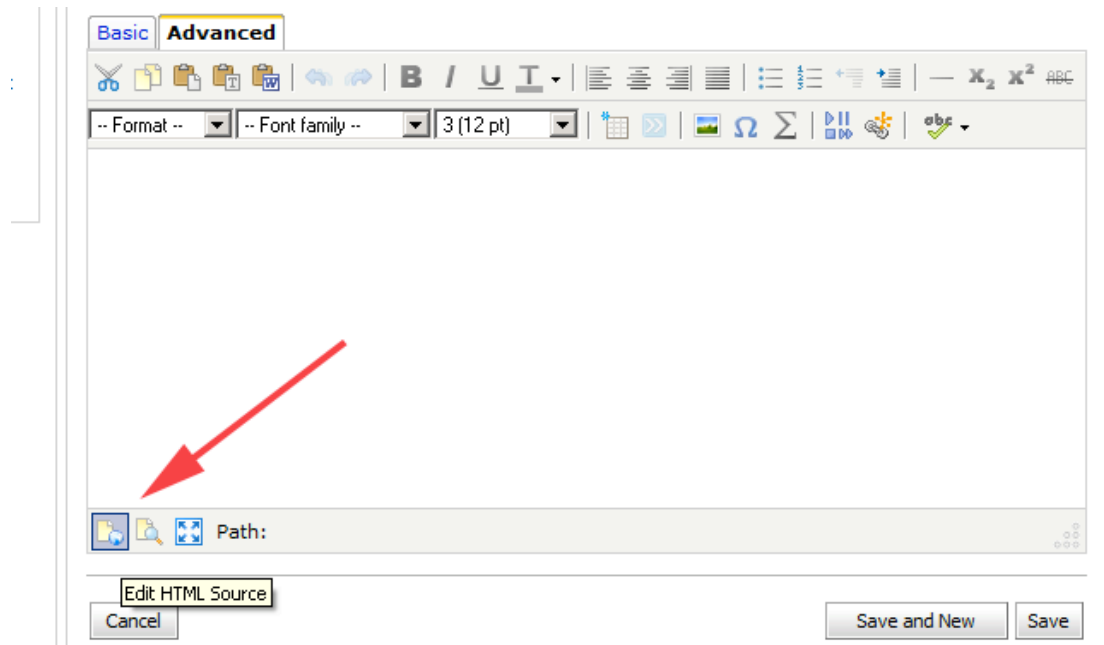

Copy the ticket URL

Create a topic in D2L

Create a new topic in D2L using the Create New File option

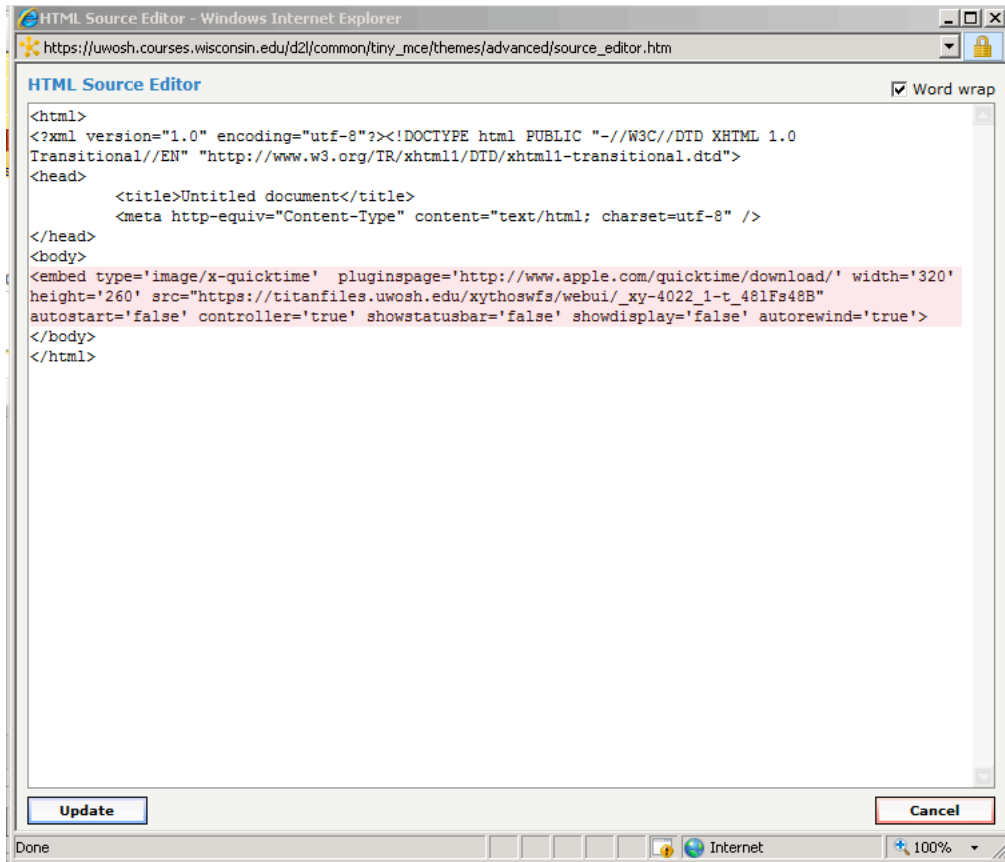At the bottom of the HTML editor window, click the Edit HTML Source icon

In the window that opens, between the <body> and </body> tags, paste the following:

<embed type='image/x-quicktime' pluginspage='http://www.apple.com/quicktime/download/' width='XXX' height='XXX' src="[your Titan Files ticket URL]" autostart='false' controller='true' showstatusbar='false' showdisplay='false' autorewind='true'>

Replace [your Titan Files ticket URL] with your Titan Files ticket URL. Make sure the quotation mark before and after the URL remain and **there is no space between the quotation marks and the URL.**
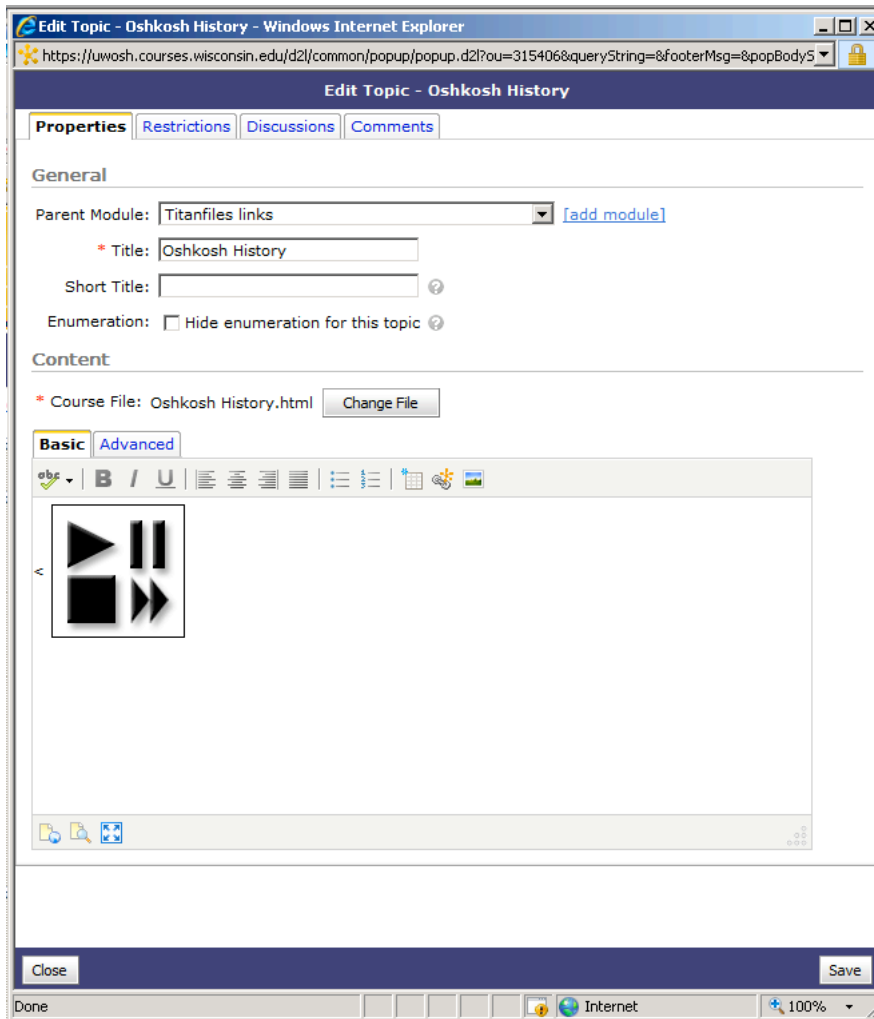
Replace the XXX after width with the width in pixels of your movie. Again, make sure to leave the single quote marks before and after the numbers

Replace XXX after height with the height of you movie in pixels **plus 20** (to accommodate the controller.) Again, make sure to leave the single quote marks before and after the numbers

```
HTML Source Editor - Windows Internet Explorer

https://uwosh.courses.wisconsin.edu/d2l/common/tiny_mce/themes/advanced/source_editor.htm

HTML Source Editor                                                    ☑ Word wrap
<html>
<?xml version="1.0" encoding="utf-8"?><!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0
Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<head>
        <title>Untitled document</title>
        <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
</head>
<body>
<embed type='image/x-quicktime'  pluginspage='http://www.apple.com/quicktime/download/' width='320'
height='260' src="https://titanfiles.uwosh.edu/xythoswfs/webui/_xy-4022_1-t_48lFs48B"
autostart='false' controller='true' showstatusbar='false' showdisplay='false' autorewind='true'>
</body>
</html>






            Update                                                   Cancel

Done                                        Internet              100%
```

Click Update.

That will return you to the HTML editor

Click Save, and then Close.

The movie will then be embedded on the page.

Works for audio only files too.

You can do the same thing with MP3 files.

You obviously don't have to find out the height and width for an audio only file. Use 30 pixels for the height and 200 pixels for the width. If you use a narrower width the timer doesn't appear on the controller.